




PLUG AND PLAY INTO HEAT PUMP EFFICIENCY WITH STATE'S PREMIER® 120V

Our family of smart Premier® 120V heat pump water heaters are designed to plug into a standard 120 volt wall outlet for easy installation. With up to a 3.2 UEF, homeowners will reduce their carbon footprint and enjoy annual savings up to \$118 on utility bills* compared to a gas water heater. Not to mention the added peace of mind with new leak protection features including leak detection and automatic water shutoff.

Model Number	Nominal Capacity	Rated Storage Volume	UEF	First Hour Rating (gallons)	Dimensions in Inches		Approx Shipping Weight (lbs)	Warranty Term
					Height	Width		
HPVX-66	66	68	3.2	76	61.5	26.5	289	10
HPVX-80	80	82	3.0	93	69	26.5	307	10

*Comparing 66-gallon Premier 120V heat pump against pre-2015 similarly-sized standard gas water heater using DOE EF to UEF conversion rates \$0.14 per kWh electricity and \$1.21 per therm of natural gas.

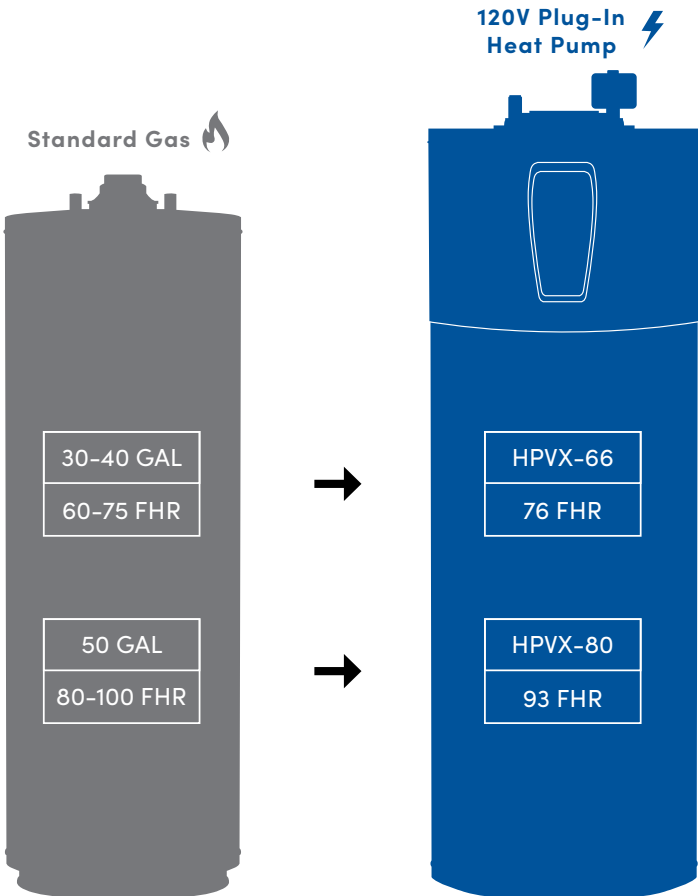

Education Before Electrification

When converting from a gas water heater to a Premier 120V, the customer will need to “size up” to ensure they receive equivalent hot water delivery. Heat pump water heaters are more efficient, but that does not mean they heat water faster. For example, the first hour rating of a 40-gallon gas water heater is comparable to the first hour rating of a 66-gallon 120V HPWH.